

TUNNEL

Ø 140 mm

version:

- 18 amber or blue LEDs
- 36 amber LEDs



éco


technique

IP67 | IK06 | class 3 | 850°

70% luminous flux | 100 000 h^{typ(h)}

24Vdc	18 LED CMS	2W
	36 LED CMS	

Ø130

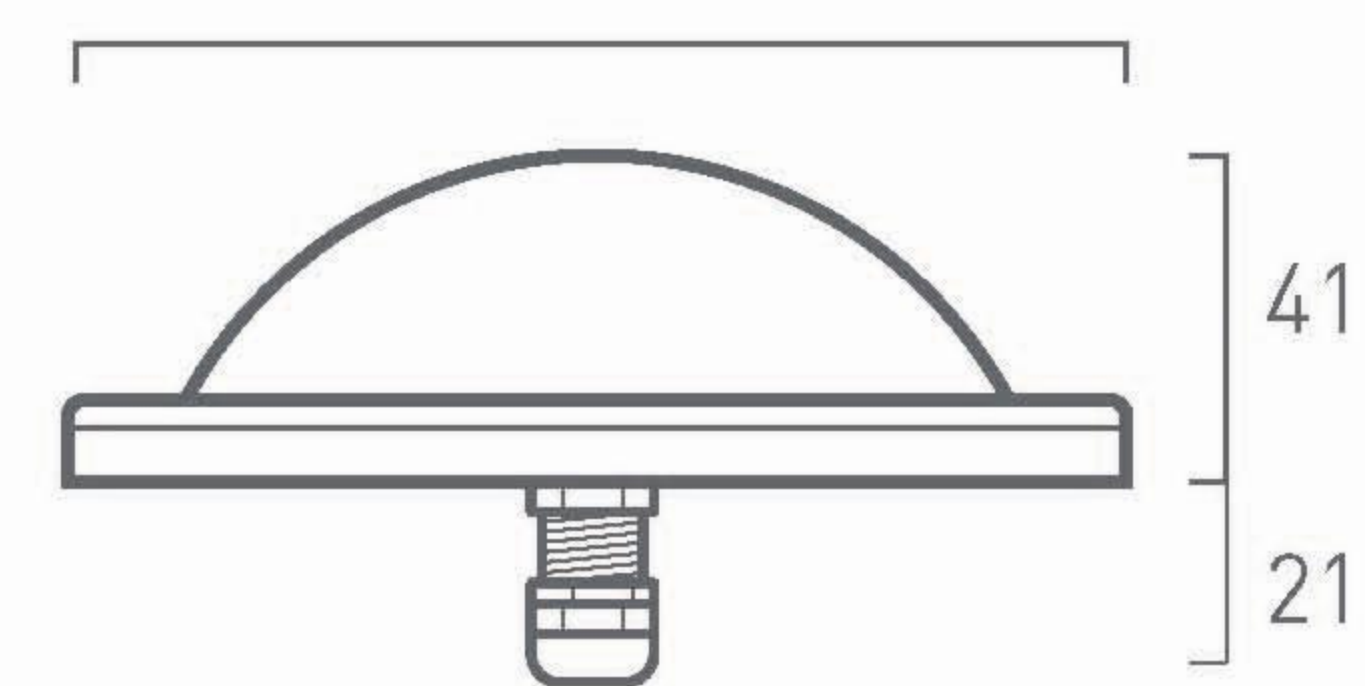

Wall marking fixture. Since its creation from a highly demanding road safety STGC, this fixture has proven itself in tunnels, with a remarkable quality/price ratio.

finishes

material:

transparent polycarbonate

window:

clear polycarbonate

LED colours:

- amber (2 x 18 LED)
- amber (1 x 18 LED)
- blue (2 x 9 LED)

power supply



alimentation étanche
230Vac/24Vdc - 150W
IP67



alimentation étanche
230Vac/24Vdc - 240W
IP67

Surface mounting connection box

- Tunnel connecting box Ø140mm + 1 gland and terminal block
- Tunnel connecting box Ø140mm + 1 gland and terminal block
- Tunnel connecting box Ø140mm + 2 glands and terminal block
- Tunnel connecting box Ø140mm + 1 connec. for soldering and terminal block (output 1 quick connector)
- Tunnel connecting box Ø140mm + 1 connec. for soldering and terminal block (output 2 quick connectors)
- Factory assembled fixture and connection box supplied with 4 captive screws M6x50 for fixing

