



# SignBOX II

## LED illumination for single or double-sided sign boxes



Easy to install—flexible and firm—SignBOX™ II creates the perfect grid of light for optimum even illumination. Designed for new or retrofit sign cabinets with depths over 125 mm. Available in single-sided and double-sided options.

- Bright, even illumination
- Mounted on flexible straps for easy installation
- Constant Current Technology (CCT)

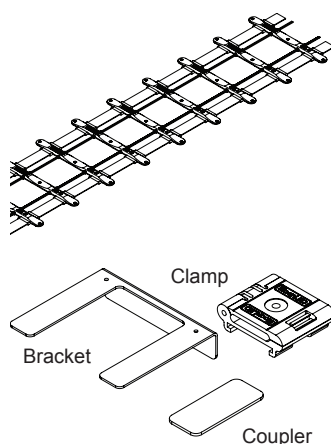

### Specifications

|                              |   |                |               |
|------------------------------|---|----------------|---------------|
| <b>Part number</b>           | Single-sided  | White (6500 K) | 701946-6WS201 |
|                              | Single-sided  | White (5000 K) | 701946-5WS201 |
|                              | Double-sided  | White (6500 K) | 701946-6WD201 |
|                              | Double-sided  | White (5000 K) | 701946-5WD201 |
| <b>Dimensions L × W × H</b>  | 216 mm × 26 mm × 8 mm<br>60 modules per 6,1 m chain |                |               |
| <b>Viewing angle</b>         | 120°  |                |               |
| <b>LEDs per module</b>       | Single-sided  | 3              |               |
|                              | Double-sided  | 6              |               |
| <b>Modules per meter</b>     | 10  |                |               |
| <b>Coverage per row</b>      | 300 mm  |                |               |
| <b>Optimal light throw</b>   | 125 to 300 mm from face                             |                |               |
| <b>Operating temperature</b> | -40° C to +70° C                                    |                |               |
| <b>Protection class</b>      | IP66  |                |               |
| <b>Special feature</b>       | Cutttable in 100 mm increments                      |                |               |
| <b>Power per module</b>      | Single-sided  | 0,90 W         |               |
|                              | Double-sided  | 1,80 W         |               |
| <b>Efficacy</b>              | 100 lm/W  |                |               |
| <b>Power capacity</b>        | Per SloanLED 60 W 12 VDC power supply               |                |               |
|                              | Single-sided  | 60 modules     |               |
|                              | Double-sided  | 30 modules     |               |
| <b>Fastening</b>             | Clamps with mechanical fasteners                    |                |               |
| <b>Packaging</b>             | 60 modules per carton, 16 clamps included           |                |               |
| <b>Colours</b>               | White (6500 K), White (5000 K)                      |                |               |
| <b>Lumens per module</b>     | Single-sided  | 90             |               |
|                              | Double-sided  | 180            |               |

# SignBOX II

**LED illumination for single- or double-sided box signs**

## Specifications *cont'd*

|                   |         |           |           |
|-------------------|---------|-----------|-----------|
| Mounting hardware | Bracket | Bag of 10 | 401309-10 |
|                   | Clamp   | Bag of 16 | 410155-16 |
|                   | Coupler | Bag of 10 | 401330-10 |

